



STRATEX™

STRATEGIC THERMAL RECONNAISSANCE

// DRONE-SCAN COMPREHENSIVE REPORT

1247 Bluegrass Pkwy, Lexington, KY 40503

Prepared for The Whitaker Family • by Crown Roofing

DELIVERABLE ID

STRATEX-AD-KY041-20260...

PROJECT CODE

AD-KY041

PILOT

Ramon Field

GENERATED

6/1/2026



Flight Record



PROJECT CODE

AD-KY041



PILOT IN COMMAND

Ramon Field



STARTED

Feb 15, 2026, 12:42 AM



COMPLETED

Feb 15, 2026, 1:17 AM



WEATHER AT CAPTURE

Clear · Post-Sunset · 38.2°F · wind 4.1 / gust 6.8 mph



CALIBRATION

± 0.92 · Radiometrically corrected

FRAMES

1284 captured

PASSES

4 orbits

RTK LOCK

100% precision

UPLINK

92 dBm avg signal



Roof Composition • Digital Twin

TOTAL SQUARES

16.21 sq

TOTAL SQ FT

1,621 ft²

VALLEYS

148.7 lf

FACET ROLL-UP

FACET	LABEL	SQ FT	PITCH	EXP
F1	South Facing	612	8/12	S
F2	North Facing	612	8/12	N
F3	East Dormer	198	10/12	E
F4	West Dormer	199	10/12	W


PRIMARY MATERIAL

Finished Slate

SUB-LAYER

Ice & Water Shield + Synthet...

3D DIGITAL TWIN • FORENSIC OVERLAY

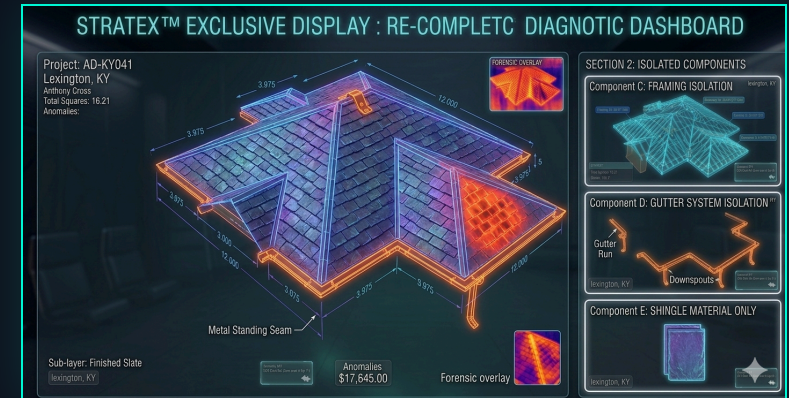



Quantified Geometry

ROOF • NET SQUARES

16.21_{sq}

VALLEY • LINEAR FEET

148.66_{lf}

RAKE & GABLE • LINEAR

192.33_{lf}

WALL SIDING • NET AREA

2,450_{ft²}



Sub-Surface Moisture Diagnostics

GRID

Grid B2-RED-H1

High Dormer Corner

CONCERN

CODE A14-RED-V1

CRITICAL

PROBABILITY

78%

FIELD NOTE

Trapped moisture detected. High risk of CDX deck rot and structural framing decay.

GRID

Grid C4-1 & C4-2

Multiple Valley Junction

CONCERN

CODE C33-YELLOW-V3

MILD

PROBABILITY

65%

FIELD NOTE

Elevated moisture detected near transition runs. Monitor closely.



Anomaly Findings

// P1 • AD-KY041-004 • FACET F2

Trapped Moisture / CDX Deck Rot

38.7 ft² affected · depth 0.55"

Remediation: Cut & replace 4×8 CDX section ·
re-bed I&WS · color-match slate replacement

CONF 92.5%

\$17,645.00



Project Phase Breakdown



PHASE

Framing

Structural framing repair, dormer corner reconstruction, sub-deck reinforcement

180 man-hours · 26.9% of total

PHASE TOTAL

\$61,714.00



PHASE

Roofing

Finished slate replacement, valley re-detail, ridge & hip cap, I&WS underlayment

285 man-hours · 42.0% of total

PHASE TOTAL

\$96,170.00



PHASE

Gutters

Half-round copper gutter replacement, downspouts, internal box gutter relining

55 man-hours · 9.8% of total

PHASE TOTAL

\$22,538.00



PHASE

Siding

James Hardie fiber-cement plank, factory-finished, color-matched to historic palette

120 man-hours · 21.3% of total

PHASE TOTAL

\$48,734.00

COMBINED MAN-HOURS

640

PHASE SUBTOTAL

\$229,156.00



Standard Pricing

LINE ITEM	AMOUNT
Material · Finished Slate (16.21sq × \$685.00/sq)	\$11,103.85
Labor · install (16.21sq × \$175.00/sq)	\$2,836.75
Tear-off & disposal (16.21sq × \$95.00/sq)	\$1,539.95
Underlayment · I&WS + synthetic (16.21sq × \$28.00/sq)	\$453.88
Valley detail · custom step flash (148.7 lf × \$14.50/lf)	\$2,155.71
Permits & dump fees	\$285.00
Anomaly AD-KY041-004 · Trapped Moisture / CDX Deck Rot · Cut & replace 4×8 CDX section · re-bed I&WS · color-match slate replacement	\$17,645.00
Subtotal	\$36,020.14
Overhead (18%)	\$6,483.63
Margin (22%)	\$9,350.83

TOTAL ESTIMATE

\$51,854.60

Valid through 2026-07-01
(30 days from issue)

Pricing subject to material market shifts
> 5%.



Disposal • Overall Project Value

DUMPSTER • FLAT FEE

\$1,800.00

COMBINED MAN-HOURS

640

OVERALL PROJECT VALUE

\$203,080.00



// SECTION 10 OF 10

Acceptance & Sign-off

STRATEX™ DECK

STRATEX-AD-KY041-20260601

This deliverable was assembled from radiometrically-corrected drone telemetry. STRATEX™ certifies the geometric measurements and forensic classifications above; remediation pricing reflects the contractor's standard schedule and is subject to on-site verification.

AUTHORIZED BY

ACCEPTED BY

Crown Roofing — Project Lead

📄 License No. LIC-KY-99214X

The Whitaker Family — Homeowner / Property Owner

📍 1247 Bluegrass Pkwy, Lexington, KY 40503

// END OF DECK • STRATEX™ STRATEX-AD-KY041-20260601