



⚠ VARIANCE FLAGGED · ADMIN REVIEW


PREPARED FOR		PREPARED BY	
👤 Client	The Whitaker Family	👤 Contractor	Crown Roofing
📍 Property	1247 Bluegrass Pkwy, Lexington, KY 40503	👤 Project Lead	Tony Cross
Email	g.whitaker@protonmail.com	👤 License No.	LIC-KY-99214X
Phone	(859) 555-0142	Region	Lexington, KY · Central Kentucky Service Region

FLIGHT RECORD		👤 Pilot in Command	Ramon Field
🔧 Project Code	AD-KY041	📅 Flight Completed	Sun, Feb 15, 2026, 1:17 AM UTC
🕒 Flight Started	Sun, Feb 15, 2026, 12:42 AM UTC	📏 Calibration	± 0.92 · Radiometrically corrected
🌤 Weather at Capture	Clear · Post-Sunset · 38.2°F · wind 4.1/6.8mph	RTK / Uplink	100% lock · 92 dBm avg
Frames Captured	1284 · 4 passes		

🏠 ROOF COMPOSITION · DIGITAL TWIN

TOTAL SQUARES 16.21	TOTAL SQ FT 1,621	VALLEY LINEAR FT 148.67 lf
PRIMARY MATERIAL Finished Slate		
SUB-LAYER Ice & Water Shield + Synthetic Underlayment		

FACET	LABEL	SQ FT	PITCH	EXP
F1	South Facing	612	8/12	S
F2	North Facing	612	8/12	N
F3	East Dormer	198	10/12	E

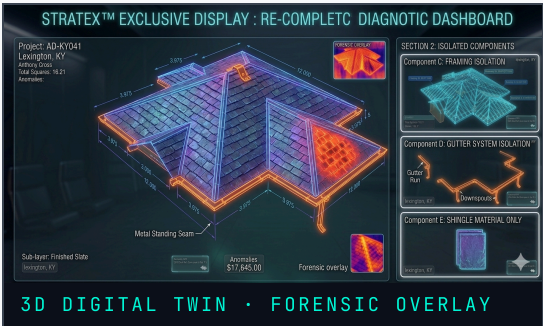

FACET	LABEL	SQ FT	PITCH	EXP
F4	West Dormer	199	10/12	W

QUANTIFIED GEOMETRY

ROOF · NET SQUARES 16.21 sq	VALLEY · LINEAR FEET 148.66 lf	RAKE & GABLE · LINEAR 192.33 lf	WALL SIDING · NET AREA 2,450 ft ²
---------------------------------------	--	---	--

SUB-SURFACE MOISTURE DIAGNOSTICS

DIAGNOSTIC GRID Grid B2-RED-H1 High Dormer Corner	CONCERN CODE CODE A14-RED-V1 CRITICAL	PROBABILITY 78%	FIELD NOTE Trapped moisture detected. High risk of CDX deck rot and structural framing decay.
DIAGNOSTIC GRID Grid C4-1 & C4-2 Multiple Valley Junction	CONCERN CODE CODE C33-YELLOW-V3 MILD	PROBABILITY 65%	FIELD NOTE Elevated moisture detected near transition runs. Monitor closely.

ANOMALY FINDINGS

// P1 · AD-KY041-004 · FACET F2

Trapped Moisture / CDX Deck Rot

Affected area: 38.7 sq ft · depth 0.55"

Recommended remediation: Cut & replace 4x8 CDX section · re-bed I&WS · color-match slate replacement

Remediation cost · \$17,645.00

CONFIDENCE 92.45%

THERMAL CAPTURE · AD-KY041-004

TRI-LAYER FORENSIC LEDGER

// VAPOR BARRIER · YELLOW	// EPDM PATCH · ORANGE	// CRITICAL ROT · RED
---------------------------	------------------------	-----------------------

1	REGION	2	REGIONS	2	REGIONS
---	--------	---	---------	---	---------


TIER	CODE	SEVERITY INDEX	DAMAGE SQFT	REMEDICATION	LINE TOTAL
YELLOW	A-101	VAPOR_BARRIER_INFILTRATION	380	2 × ROLLS Breathable Synthetic Vapor Barrier (Roll)	\$90.00
ORANGE	A-102	MEMBRANE_COMPROMISE_PATCH	42	3 × PATCHES EPDM Self-Adhering Membrane Patch	\$55.50
ORANGE	A-103	MEMBRANE_COMPROMISE_PATCH	18.5	2 × PATCHES EPDM Self-Adhering Membrane Patch	\$37.00
RED	A-104	CRITICAL_ROT_ALERT	64	2 × SHEETS CDX Plywood Sheets 4x8	\$77.50
RED	A-105	CRITICAL_ROT_ALERT	96.5	4 × SHEETS CDX Plywood Sheets 4x8	\$155.00
FORENSIC PHASE SUBTOTAL • BASE MATERIALS • SALES TAX @ 6.00% • LABOR 15H					\$1,609.90

// PRICING LOCKED AT SCAN TIME • PRICING_VERSION_ID PV_AF745BE369AC9FF197

🛡️ SEALED MATERIALS ENVELOPE • ROOF • WALL • GUTTER

// ROOFING SUBTOTAL \$2,403.00	// SIDING SUBTOTAL \$6,344.50	// GUTTER SUBTOTAL \$3,230.25	// ENVELOPE GRAND TOTAL \$11,977.75
-----------------------------------	----------------------------------	----------------------------------	--

SCOPE	MATERIAL	QTY	UNIT	LINE TOTAL
ROOFING	Premium Architectural Shingles	36	SQUARES	\$1,386.00
ROOFING	Synthetic Felt #15	9	ROLLS	\$720.00
ROOFING	Ice & Water Shield	1	ROLLS	\$92.00
ROOFING	Drip Edge (10ft pieces)	22	PIECES	\$46.20
ROOFING	Wall Counter/Step Flashing	28	LINEAR_FT	\$58.80
SIDING	7/16 OSB Sheathing	78	SHEETS	\$3,276.00
SIDING	1 Inch Aluminum-Faced Foam Board	76	SHEETS	\$1,862.00
SIDING	2 Inch Galvanized Roofing Nails	9600	COUNT	\$432.00
SIDING	Seam Tape	25	ROLLS	\$110.50
SIDING	Button Cap Nails	4800	COUNT	\$192.00



SCOPE	MATERIAL	QTY	UNIT	LINE TOTAL
GUTTER	6 Inch K Style ALUMINUM Gutter (10ft)	18	SECTIONS	\$2,115.00
GUTTER	6 Inch Hidden Hangers	91	COUNT	\$386.75
GUTTER	Downspout Elbows	8	COUNT	\$68.00
GUTTER	Downspout Sections (10ft)	8	SECTIONS	\$624.00
GUTTER	End Caps (LR pair)	3	PAIRS	\$19.50

// PRICING SEALED VIA FERNET/AES-256 (HKDF-SHA256 DERIVED FROM AES_KEY) · 14 LINE(S) VIA CONTRACTOR BOOK · 5 VIA SEALED SIDING BOOK · TUNE FIELD_TUNE_V1

PROJECT PHASE BREAKDOWN

	PHASE Framing	Structural framing repair, dormer corner reconstruction, sub-deck reinforcement 180 man-hours · 26.9% of total	PHASE TOTAL \$61,714.00
	PHASE Roofing	Finished slate replacement, valley re-detail, ridge & hip cap, I&WS underlayment 285 man-hours · 42.0% of total	PHASE TOTAL \$96,170.00
	PHASE Gutters	Half-round copper gutter replacement, downspouts, internal box gutter relining 55 man-hours · 9.8% of total	PHASE TOTAL \$22,538.00
	PHASE Siding	James Hardie fiber-cement plank, factory-finished, color-matched to historic palette 120 man-hours · 21.3% of total	PHASE TOTAL \$48,734.00

COMBINED MAN-HOURS 640	PHASE SUBTOTAL \$229,156.00
----------------------------------	---------------------------------------

STANDARD PRICING

LINE ITEM	AMOUNT
Material · Finished Slate (16.21sq × \$685.00/sq)	\$11,103.85
Labor · install (16.21sq × \$175.00/sq)	\$2,836.75
Tear-off & disposal (16.21sq × \$95.00/sq)	\$1,539.95
Underlayment · I&WS + synthetic (16.21sq × \$28.00/sq)	\$453.88
Valley detail · custom step flash (148.7 lf × \$14.50/lf)	\$2,155.71
Permits & dump fees	\$285.00
Anomaly AD-KY041-004 · Trapped Moisture / CDX Deck Rot · Cut & replace 4x8 CDX section · re-bed I&WS · color-match slate replacement	\$17,645.00
Subtotal	\$36,020.14
Overhead (18%)	\$6,483.63
Margin (22%)	\$9,350.83
TOTAL · ESTIMATE	\$51,854.60

Estimate valid through 2026-07-01 (30 days). Pricing subject to material market shifts >5%.

 DISPOSAL & OVERALL PROJECT VALUE

DUMPSTER · FLAT FEE \$1,800.00	COMBINED MAN-HOURS 640	OVERALL PROJECT VALUE \$203,080.00
--	----------------------------------	--

AUTHORIZED BY

ACCEPTED BY

Crown Roofing — Project Lead

The Whitaker Family — Homeowner / Property Owner

Generated by STRATEX™ Strategic Thermal Reconnaissance · STRATEX-AD-KY041-20260601 · This deliverable was assembled from radiometrically-corrected drone telemetry. STRATEX certifies the geometric measurements and forensic classifications above; remediation pricing reflects the contractor's standard schedule and is subject to on-site verification.