



American Roofing Company · Changing the Industry  
Anthony Cross · Master Contractor · LIC BC-0043 · MASTER · RESIDENTIAL & COMMERCIAL

Lexington, KY · Regency Road District  
(859) 555-0143 · americanroofing.co



STRAT

PROJECT AD-KY041 · 2440 Regency Road · Lexington, KY 40503

CONFIDENTIAL · STRATEGIC FORENSIC AUDIT



American Roofing Company

CHANGING THE INDUSTRY  
LICENSED MASTER CONTRACTOR · BC-0043 · OSHA · DRONE PILOT

COMMISSIONED FORENSIC AUDIT

2440 Regency Road

Lexington, KY 40503

SCAN 2026-06-25 · GROUND-TRUTH ±0.78 cm



STRAT

FORENSIC ENVELOPE AUDIT · V1.0

# Strategic Thermal Reconnaissance Report

TOTAL SQUARES

24.31

SQ (100 sf)

SHINGLE LAYERS

2 / 2

DETECTED / CODE MAX

FACETS

11

DISTINCT PLANES

ANOMALIES FLAGGED

3

FORENSIC HOTSPOTS

EXECUTIVE SUMMARY · GRAND TOTAL RANGE

\$32,491.38 → \$33,996.38

MATERIALS \$23,407.50 · LABOR \$6,028.88 · TEAR-OFF \$1,850.00 · UNFORESEEN \$1,205.00-\$2,710.00

STRATEX RECOMMENDATION

TEAR OFF

Two existing shingle layers + 88% sub-surface moisture probability exceeds code re-roof limit. Full tear-off, decking remediation, and new-install is the only insurable path.



American Roofing Company · Changing the Industry  
Anthony Cross · Master Contractor · LIC BC-0043 · MASTER · RESIDENTIAL & COMMERCIAL

Lexington, KY · Regency Road District  
(859) 555-0143 · americanroofing.co



STRAT


PROJECT AD-KY041 · 2440 Regency Road · Lexington, KY 40503

PAGE 01 · EXECUTIVE ENVELOPE SUMMARY

01 · EXECUTIVE ENVELOPE SUMMARY

# Building Envelope Score

## ENERGY DEFICIENCY



78%

DEFICIENT

## VENTILATION



45%

POOR

## OVERALL ENVELOPE

55/100

COMPOSITE

### AI-PRIORITIZED MAINTENANCE QUEUE

|   |        |                                           |          |
|---|--------|-------------------------------------------|----------|
| 1 | URGENT | Replace Front Door Weatherstripping       | \$150/yr |
| 2 | HIGH   | Remediate Blocked Attic Soffit Vents      | \$110/yr |
| 3 | HIGH   | Inspect and Seal 2nd-Story Window Headers | \$95/yr  |
| 4 | MED    | Add Attic Baffles for Cross-Ventilation   | \$70/yr  |

### THERMAL FORENSIC FINDINGS


|                          |               |        |
|--------------------------|---------------|--------|
| Ridge Vent Performance   | LOW FLOW      | MED    |
| Soffit Vents Open        | 8 / 22        | HIGH   |
| Front Door Seal Failure  | SEVERE        | SEVERE |
| 2nd-Story Window Headers | WARM (+4.1°C) | HIGH   |



Sub-surface

Anomaly Atlas

RADIOMETRIC OVERLAY · ROOF

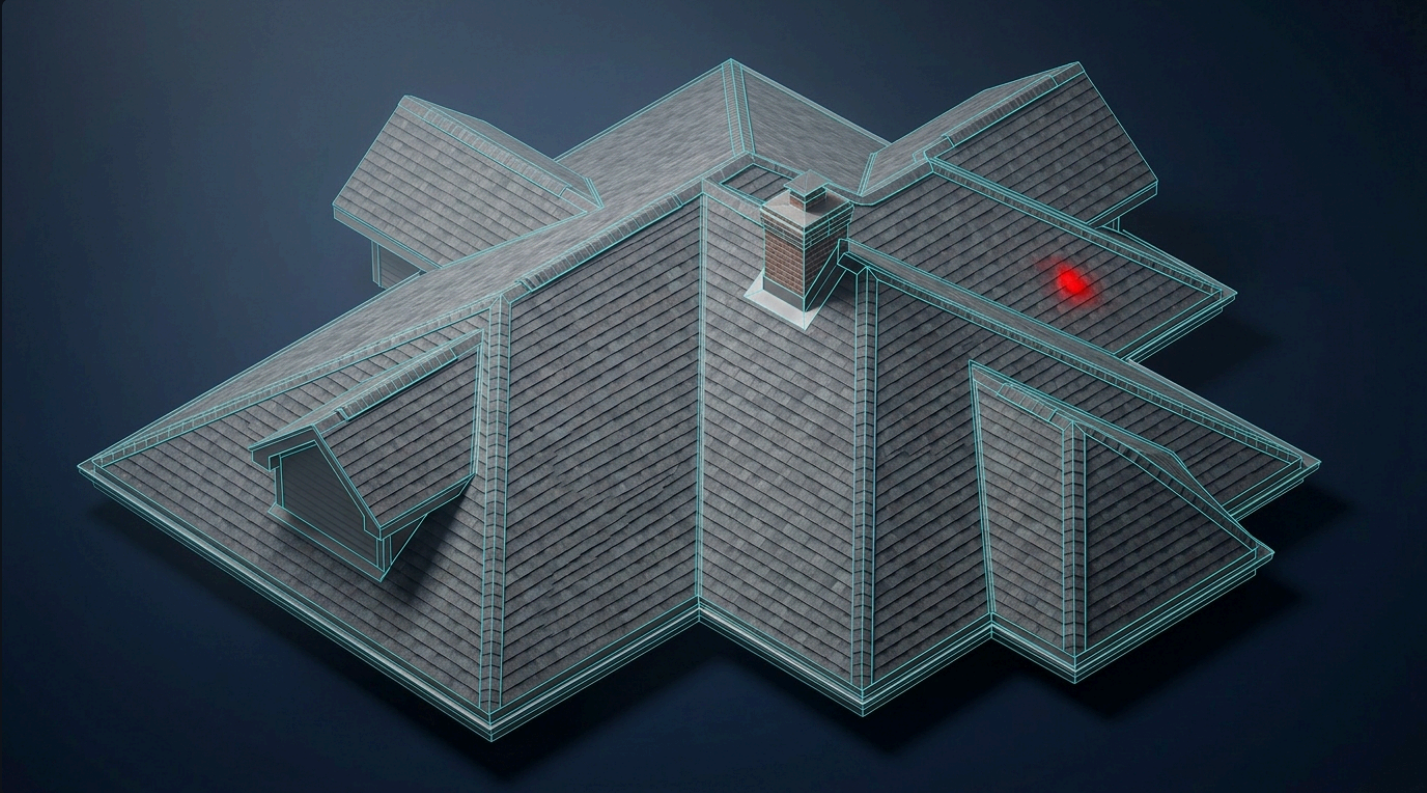

CYAN: scan-vector overlay · ORANGE: thermal hotspot · Confidence threshold  $\geq$  85%

ANOMALY LEDGER

| SEV    | ID           | TYPE               | LOCATION            | CONF  | SF    | DIAGNOSIS                                               | EST         |
|--------|--------------|--------------------|---------------------|-------|-------|---------------------------------------------------------|-------------|
| URGENT | AD-KY041-004 | CDX Deck Rot       | Facet F2 (Rear Hip) | 92.3% | 164.2 | Trapped sub-surface moisture, multi-season propagation. | \$17,645.00 |
| HIGH   | AD-KY041-007 | Soffit Blockage    | North eave run      | 88.1% | 0.0   | Cellulose insulation blocking 14 of 22 soffit vents.    | \$1,240.00  |
| HIGH   | AD-KY041-011 | Window Header Leak | 2nd story front bay | 86.0% | 0.0   | Capillary water intrusion at flashing.                  | \$980.00    |





**American Roofing Company** · **Changing the Industry**  
Anthony Cross · Master Contractor · LIC BC-0043 · MASTER · RESIDENTIAL & COMMERCIAL

Lexington, KY · Regency Road District  
(859) 555-0143 · americanroofing.co



**STRAT** *EX*


PROJECT AD-KY041 · 2440 Regency Road · Lexington, KY 40503

PAGE 03 · TRIPLE-LAYER DIGITAL TWIN

03 · TRIPLE-LAYER DIGITAL TWIN


# Layered CAD/BIM Twin

LAYER 01 · FINISHED SLATE

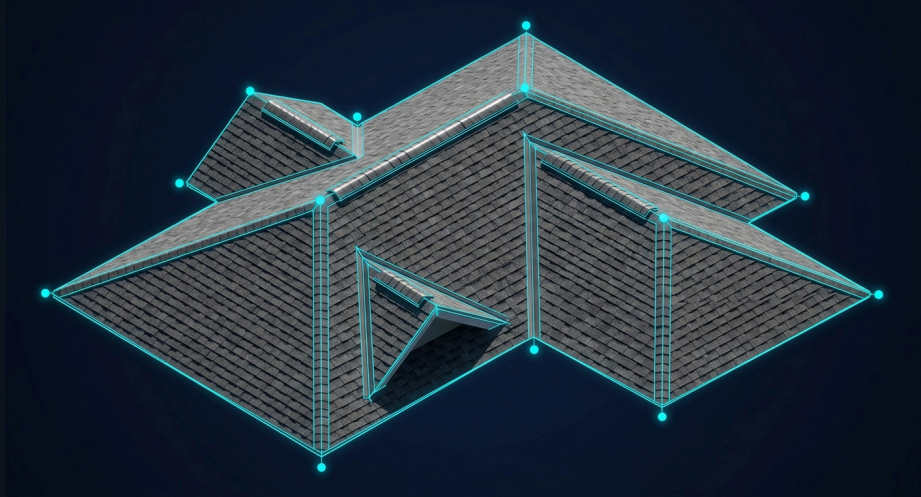


Squares 24.31 · Pitch 8/12

LAYER 02 · DECKING + UNDERLAYMENT

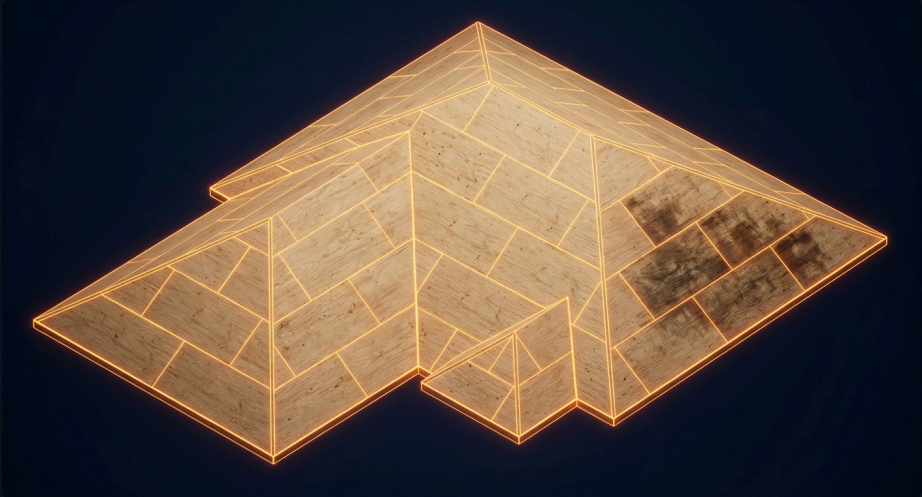

7/16" CDX · I&W shield at valleys/eaves · 2 existing shingle layer(s)

LAYER 03 · STRUCTURAL FRAMING

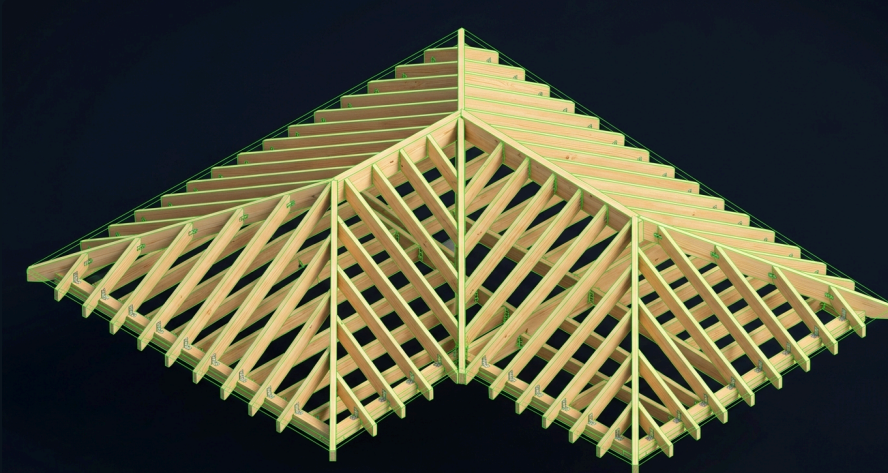

2x8 rafters @ 16" o.c. · LVL ridge · Hurricane ties **VERIFIED**

VALLEYS

**148.7**

LINEAR FT

GABLES

**192.3**

LINEAR FT

RIDGES

**62.0**

LINEAR FT

EAVES

**188.4**

LINEAR FT





Fenestration

Schedule

| ID | LOCATION         | SHAPE       | W   | H   | QTY | U-FACTOR | LEAK SEV |
|----|------------------|-------------|-----|-----|-----|----------|----------|
| W1 | Front Bay (1st)  | Double-Hung | 36" | 60" | 4   | 0.32     | MED      |
| W2 | 2nd Story Front  | Double-Hung | 32" | 54" | 5   | 0.32     | HIGH     |
| W3 | Picture (Living) | Picture     | 72" | 60" | 1   | 0.28     | LOW      |
| W4 | Bath / Kitchen   | Awning      | 28" | 32" | 3   | 0.31     | LOW      |
| W5 | Garage Service   | Slider      | 48" | 36" | 1   | 0.34     | MED      |



**American Roofing Company** · **Changing the Industry**  
Anthony Cross · Master Contractor · LIC BC-0043 · MASTER · RESIDENTIAL & COMMERCIAL

Lexington, KY · Regency Road District  
(859) 555-0143 · americanroofing.co



**STRAT****EX**

PROJECT AD-KY041 · 2440 Regency Road · Lexington, KY 40503

PAGE 05 · DOOR SCHEDULE

05 · EXTERIOR DOOR SCHEDULE

# Exterior Door Schedule

| ID | LOCATION        | SHAPE               | W    | H   | QTY | WEATHERSTRIP |
|----|-----------------|---------------------|------|-----|-----|--------------|
| D1 | Front Entry     | Fiberglass 6-panel  | 36"  | 80" | 1   | SEVERE       |
| D2 | Rear / Patio    | Sliding Glass       | 72"  | 80" | 1   | FAILED       |
| D3 | Garage to House | 20-min Fire         | 32"  | 80" | 1   | WORN         |
| D4 | Garage Vehicle  | Sectional Insulated | 192" | 84" | 1   | OK           |





American Roofing Company · Changing the Industry  
Anthony Cross · Master Contractor · LIC BC-0043 · MASTER · RESIDENTIAL & COMMERCIAL

Lexington, KY · Regency Road District  
(859) 555-0143 · americanroofing.co



STRATEx

PROJECT AD-KY041 · 2440 Regency Road · Lexington, KY 40503

PAGE · WALL ENVELOPE + SIDING PACKAGE

· WALL ENVELOPE & SIDING PACKAGE · GEOMETRY + MATERIAL AGENT

# Vertical Envelope + James Hardie Package

GROSS WALL SF

2840

PRE-SUBTRACTION

FENESTRATION

286

WINDOWS + DOORS

NET WALL SF

2554

SIDING TARGET

WALL HEIGHT

18.5'

EAVE-TO-GRADE

## ELEVATION BREAKDOWN

| ELEV. | GROSS SF | NET SF | MOISTURE |
|-------|----------|--------|----------|
| Front | 780.0    | 642.0  | 14%      |
| Rear  | 780.0    | 716.4  | 36%      |
| Left  | 640.0    | 597.6  | 9%       |
| Right | 640.0    | 597.6  | 11%      |

## SIDING PACKAGE · James Hardie

PROFILE: HardiePlank Lap · 8.25" exposure · COLOR: Iron Gray

| ACCESSORY                       | QTY  | UNIT  | UNIT     | LINE       |
|---------------------------------|------|-------|----------|------------|
| HardiePlank Lap Siding          | 2554 | sf    | \$2.85   | \$7,278.90 |
| HardieTrim 4/4 (corners)        | 196  | lf    | \$4.40   | \$862.40   |
| HardieTrim Window/Door 4/4      | 312  | lf    | \$4.40   | \$1,372.80 |
| Starter Strip 1.25"             | 188  | lf    | \$1.90   | \$357.20   |
| J-Channel (Window/Door)         | 312  | lf    | \$1.45   | \$452.40   |
| Aluminum Soffit (vented)        | 540  | sf    | \$3.10   | \$1,674.00 |
| Aluminum Fascia 8"              | 188  | lf    | \$4.20   | \$789.60   |
| 5" K-Style Aluminum Gutter      | 188  | lf    | \$7.40   | \$1,391.20 |
| 3x4 Downspout w/ kick-out       | 6    | ea    | \$38.00  | \$228.00   |
| Tyvek HomeWrap 9' x 100' roll   | 3    | rolls | \$175.00 | \$525.00   |
| Hardie 6d Stainless Nail (pail) | 2    | pails | \$92.00  | \$184.00   |
| Sealant · ColorPlus Touch-Up    | 6    | tubes | \$14.50  | \$87.00    |

SIDING SUBTOTAL \$15,202.50



American Roofing Company · Changing the Industry  
Anthony Cross · Master Contractor · LIC BC-0043 · MASTER · RESIDENTIAL & COMMERCIAL

Lexington, KY · Regency Road District  
(859) 555-0143 · americanroofing.co



STRAT

PROJECT AD-KY041 · 2440 Regency Road · Lexington, KY 40503

PAGE · WALL MOISTURE + VAPOR BARRIER ANALYSIS

· WALL MOISTURE + VAPOR BARRIER · THERMAL AGENT

Sub-Siding **Moisture Atlas**

VAPOR BARRIER STATUS

DEGRADED

BARRIER PRESENT · INFRARED-CONFIRMED

ZONES FLAGGED

4

THERMAL ANOMALY ZONES · WALL CAVITY

REMEDIATION TOTAL

\$3,120.00

ROLLED INTO MATERIALS TOTAL

THERMAL SATURATION ZONES · WALL CAVITY

| ID     | ELEV. | AREA SF | MOISTURE | DAMAGE PROB. | REMEDIATION                                   | EST.       |
|--------|-------|---------|----------|--------------|-----------------------------------------------|------------|
| WMZ-01 | Rear  | 64.0    | 38%      | 72%          | Open wall · replace OSB sheathing + Tyvek     | \$1,840.00 |
| WMZ-02 | Rear  | 32.0    | 28%      | 48%          | Spot vapor-barrier patch + insulation dry-out | \$620.00   |
| WMZ-03 | Front | 18.0    | 22%      | 34%          | Re-flash bay window header · re-caulk         | \$480.00   |
| WMZ-04 | Right | 12.0    | 19%      | 26%          | Replace exterior outlet gasket + spray-foam   | \$180.00   |



American Roofing Company · Changing the Industry  
Anthony Cross · Master Contractor · LIC BC-0043 · MASTER · RESIDENTIAL & COMMERCIAL

Lexington, KY · Regency Road District  
(859) 555-0143 · americanroofing.co



STRAT

PROJECT AD-KY041 · 2440 Regency Road · Lexington, KY 40503

PAGE · ENERGY LEAKAGE ATLAS

· ENERGY LEAKAGE ATLAS · ENERGY AGENT

# Envelope Air-Leak Profile

BLOWER-DOOR ACH<sub>50</sub> (EST.)

8.4

TARGET ≤ 3.0 · LEAKY ENVELOPE

ANNUAL ENERGY LOSS

21,450 kBTU

SEASONAL LOSS · CONDITIONED ENVELOPE

ANNUAL DOLLAR LOSS

\$1,095.00 /yr

RECOVERABLE WITH REMEDIATION

## LEAK-SOURCE LEDGER

| SOURCE                         | LOCATION           | BTU LOSS | \$/YR    | RECOMMENDED FIX                                  |
|--------------------------------|--------------------|----------|----------|--------------------------------------------------|
| Front Door Seal Failure        | Front Entry D1     | 22%      | \$241/yr | Replace weatherstripping + door sweep            |
| 2nd-Story Window Headers       | Front W2 (×5)      | 18%      | \$197/yr | Re-flash + foam-seal header cavities             |
| Sliding Patio Door Track       | Rear D2            | 14%      | \$153/yr | Replace track gaskets + adjust roller            |
| Attic Hatch / Pull-Down        | 2nd-floor hall     | 11%      | \$120/yr | Install insulated hatch cover + weatherstripping |
| Rim-Joist Air Infiltration     | Basement perimeter | 13%      | \$142/yr | Closed-cell spray foam rim joists (188 lf)       |
| Garage-to-House Door           | D3                 | 8%       | \$88/yr  | New weatherstrip + auto-door-bottom              |
| Recessed-Can Lights (un-rated) | Cathedral ceiling  | 14%      | \$154/yr | Swap to IC-AT rated LED + air-seal               |





American Roofing Company · Changing the Industry  
Anthony Cross · Master Contractor · LIC BC-0043 · MASTER · RESIDENTIAL & COMMERCIAL

Lexington, KY · Regency Road District  
(859) 555-0143 · americanroofing.co



STRAT<sup>EX</sup>

PROJECT AD-KY041 · 2440 Regency Road · Lexington, KY 40503

PAGE 06 · BILL OF MATERIALS

06 · STRATEX QUANT™ BOM

Bill of Materials

| CATEGORY        | MATERIAL                                           | SKU           | QTY | UNIT         | UNIT COST | LINE TOTAL  |
|-----------------|----------------------------------------------------|---------------|-----|--------------|-----------|-------------|
| Underlayment    | #15 Felt Roll                                      | SKU-FELT-15   | 16  | rolls        | \$49.00   | \$784.00    |
| Underlayment    | Ice & Water Shield 36"                             | SKU-IW-75     | 4   | rolls        | \$110.00  | \$440.00    |
| Metal Flashing  | Aluminum Drip Edge 10' Black                       | SKU-DRIP-10   | 17  | 10' sections | \$9.50    | \$161.50    |
| Metal Flashing  | 5x7 Aluminum Step Flashing                         | SKU-STEP-5F   | 80  | ea           | \$0.85    | \$68.00     |
| Metal Flashing  | Aluminum Roll Flashing 16"                         | SKU-ROLL-ALU  | 1   | 50' roll     | \$64.00   | \$64.00     |
| Shingles        | Starter Strip (Three-Tab)                          | SKU-STARTER   | 3   | bundles      | \$34.00   | \$102.00    |
| Shingles        | Hip & Ridge Cap (Three-Tab)                        | SKU-HIP-CAP   | 5   | bundles      | \$32.00   | \$160.00    |
| Shingles        | Architectural Dimensional (Owens Corning Duration) | SKU-SHINGLE-V | 74  | bundles      | \$33.00   | \$2,442.00  |
| Ventilation     | Continuous Shingle-Over Ridge Vent 4'              | SKU-RIDGE-V-L | 12  | 4' sections  | \$19.50   | \$234.00    |
| Ventilation     | RV-28 Static Slant Back Vent (Black)               | SKU-SLANT-BLK | 4   | ea           | \$19.50   | \$78.00     |
| Fasteners       | 1" Plastic Cap Nails (7,500 ct)                    | SKU-CAP-1     | 1   | box          | \$19.50   | \$19.50     |
| Decking         | 7/16" CDX Plywood 4x8                              | SKU-CDX-716   | 14  | sheets       | \$38.00   | \$532.00    |
| MATERIALS TOTAL |                                                    |               |     |              |           | \$23,407.50 |



• ASSEMBLY & COMPONENT LIBRARY

# Isometric Component Reference

Every assembly element specified for this scope-of-work, rendered isometrically with its trade code and gauge / dimensional callout. Cross-reference each card to the Xactimate-tagged line items on the Bill-of-Materials page.

CODE • VS-JCH-075

ASSEMBLY

## J-Channel • 3/4" Receiver



0.044" vinyl • 12'6" stock • receives panel edges around openings & terminations.

CODE • VS-FCH-050

ASSEMBLY

## F-Channel • Soffit Receiver



0.044" vinyl • 12'6" • holds soffit panels along wall & fascia line.

CODE • VS-STR-LCK

ASSEMBLY

## Starter Strip • Lock-In




10' aluminum • interlocks first course; sets level reference for full elevation.

CODE • VS-FNT-100

ASSEMBLY

## Finish / Undersill Trim

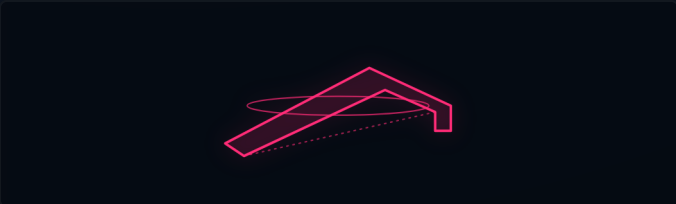


12'6" vinyl • caps top course beneath J-channel or eave return.

CODE • RF-DRP-500

ASSEMBLY

## Drip Edge • 5" L-Flashing

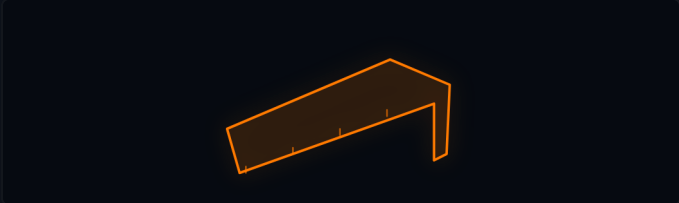


0.019" aluminum • 10' lengths • directs runoff into gutter trough.

CODE • SF-VNT-V12

ASSEMBLY

## Vented Soffit Panel

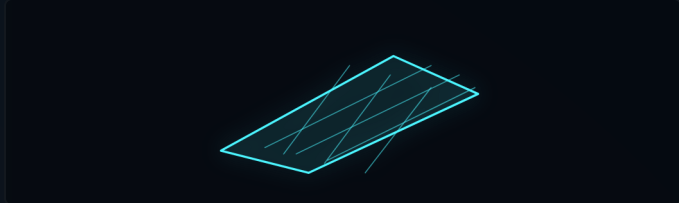

12" length • 0.044" vinyl, integrally vented • NFA 10 sq.in./LF.

CODE • VS-ICP-075

ASSEMBLY

## Inside Corner Post • 3/4"




10' vinyl • double-channel receives panel ends at inside corners.

CODE • VS-UTL-CAP

ASSEMBLY

## Utility / Cap Trim

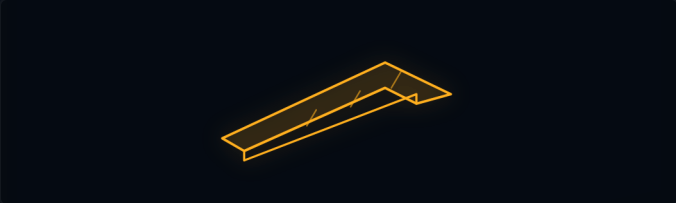

12'6" vinyl • caps J-channel returns & creates clean terminations.



American Roofing Company • Changing the Industry  
Anthony Cross • Master Contractor • LIC BC-0043 • MASTER • RESIDENTIAL & COMMERCIAL

Lexington, KY • Regency Road District  
(859) 555-0143 • americanroofing.co



STRAT

PROJECT AD-KY041 • 2440 Regency Road • Lexington, KY 40503

PAGE 07 • LABOR • NATIONAL & REGIONAL AVERAGES

07 • LABOR ALLOCATION

# Crew Economics

## RATE BENCHMARK

NATIONAL AVG / SQ

\$285.00

REGIONAL AVG / SQ

\$248.00

REGION: KY / Mid-South • APPLIED: \$248.00/SQ

## CREW PLAN

CREW SIZE

4

DAYS

2.5

LABOR TOTAL

\$6,028.88



American Roofing Company · Changing the Industry  
Anthony Cross · Master Contractor · LIC BC-0043 · MASTER · RESIDENTIAL & COMMERCIAL

Lexington, KY · Regency Road District  
(859) 555-0143 · americanroofing.co



STRAT<sup>EX</sup>

PROJECT AD-KY041 · 2440 Regency Road · Lexington, KY 40503

PAGE · LABOR & MAN-HOURS · GANTT SEQUENCE

· LABOR SEQUENCE · GANTT TIMELINE

# Crew Choreography

| PHASE                         | CREW        | DURATION | TIMELINE · 2.7 d |
|-------------------------------|-------------|----------|------------------|
| Mobilization & Site Setup     | Supervision | 0.25 d   | <div></div>      |
| Tear-Off (existing 2 layers)  | Roof Crew   | 0.50 d   | <div></div>      |
| Decking Remediation (CDX rot) | Carpentry   | 0.50 d   | <div></div>      |
| Underlayment + I&W Shield     | Roof Crew   | 0.40 d   | <div></div>      |
| Shingle Install (24.3 sq)     | Roof Crew   | 0.70 d   | <div></div>      |
| Wall Cavity Vapor Repair      | Carpentry   | 1.00 d   | <div></div>      |
| Hardie Siding Hang + Trim     | Sheet-Metal | 0.90 d   | <div></div>      |
| Gutter + Downspout Install    | Sheet-Metal | 0.20 d   | <div></div>      |
| Weatherstrip / Energy Sealing | Carpentry   | 0.10 d   | <div></div>      |
| Cleanup + Final Inspection    | Supervision | 0.10 d   | <div></div>      |






Project

Margin Overview

COST COMPOSITION

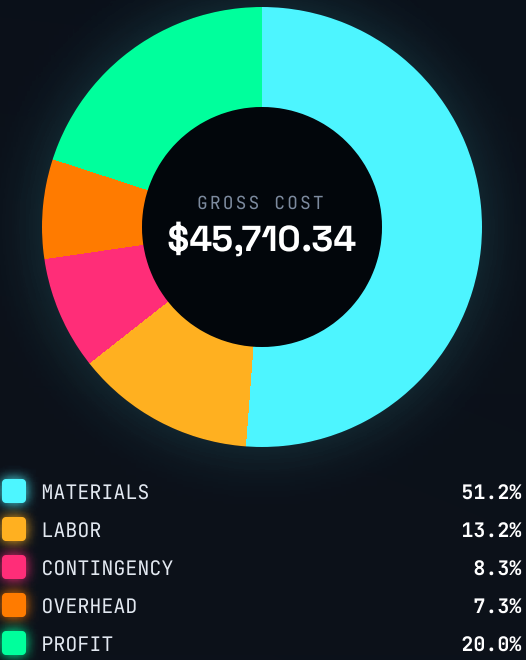

FINANCIAL SUMMARY

|                                  |             |
|----------------------------------|-------------|
| GROSS PROJECT REVENUE            | \$45,710.34 |
| TOTAL MATERIALS                  | \$23,407.50 |
| TOTAL LABOR                      | \$6,028.88  |
| CONTINGENCY (tear-off + reserve) | \$3,807.50  |
| OVERHEAD (10%)                   | \$3,324.39  |
| PROJECTED NET PROFIT (20%)       | \$9,142.07  |

Project margin reasonable for forensic insurance restoration: 20 % net under 10/20 O&P caps. Retail equivalent would carry 28-32 % net.



American Roofing Company · Changing the Industry  
Anthony Cross · Master Contractor · LIC BC-0043 · MASTER · RESIDENTIAL & COMMERCIAL

Lexington, KY · Regency Road District  
(859) 555-0143 · americanroofing.co



STRAT<sup>EX</sup>

PROJECT AD-KY041 · 2440 Regency Road · Lexington, KY 40503

PAGE 08 · SIDE QUOTE · UNFORESEEN REPAIRS

08 · CONTINGENCY ENVELOPE

# Unforeseen Repair Reserve

| ITEM                                  | PROB | LOW        | HIGH       | NOTE                                                             |
|---------------------------------------|------|------------|------------|------------------------------------------------------------------|
| Additional CDX sheets (rot discovery) | 65%  | \$380.00   | \$950.00   | If hidden rot extends beyond Facet F2 once shingles are removed. |
| Chimney flashing rebuild              | 45%  | \$425.00   | \$880.00   | Existing flashing shows oxidation; may not survive tear-off.     |
| Fascia replacement (rear elevation)   | 30%  | \$220.00   | \$540.00   | Sub-fascia rot suspected near AD-KY041-004 hotspot.              |
| Bath fan vent re-route                | 20%  | \$180.00   | \$340.00   | Currently dumping into attic – code violation if discovered.     |
| RESERVE RANGE                         |      | \$1,205.00 | \$2,710.00 |                                                                  |



American Roofing Company · Changing the Industry  
Anthony Cross · Master Contractor · LIC BC-0043 · MASTER · RESIDENTIAL & COMMERCIAL

Lexington, KY · Regency Road District  
(859) 555-0143 · americanroofing.co



STRAT

PROJECT AD-KY041 · 2440 Regency Road · Lexington, KY 40503

PAGE 09 · TEAR-OFF RECOMMENDATION

09 · TEAR-OFF MANDATE

# Full Tear-Off + New Install Required

WATER RETENTION PROBABILITY

88%

DEPTH EST 0.60" · MULTI-SEASON ENTRAPMENT

RATIONALE

Two existing shingle layers + 88% sub-surface moisture probability exceeds code re-roof limit. Full tear-off, decking remediation, and new-install is the only insurable path.

TEAR-OFF COST INCLUDED

\$1,850.00



American Roofing Company · Changing the Industry  
Anthony Cross · Master Contractor · LIC BC-0043 · MASTER · RESIDENTIAL & COMMERCIAL

Lexington, KY · Regency Road District  
(859) 555-0143 · americanroofing.co



STRATEX

PROJECT AD-KY041 · 2440 Regency Road · Lexington, KY 40503

PAGE · EXECUTIVE SUMMARY · CERTIFICATION & REPAIR PLAN

· EXECUTIVE SUMMARY · CERTIFICATION

# Final Project Summary

TOTAL PROJECT COST

\$32,491.38

LOW · GRAND TOTAL

HIGH RANGE

\$33,996.38

HIGH · GRAND TOTAL

PROJECTED NET PROFIT

\$9,142.07

20% TARGET

URGENCY ITEMS

3

CRITICAL TASKS

## AI-PRIORITIZED REPAIR PLAN

| # | URGENCY | TASK                                      | EST. ANNUAL SAVINGS |
|---|---------|-------------------------------------------|---------------------|
| 1 | URGENT  | Replace Front Door Weatherstripping       | \$150/yr            |
| 2 | HIGH    | Remediate Blocked Attic Soffit Vents      | \$110/yr            |
| 3 | HIGH    | Inspect and Seal 2nd-Story Window Headers | \$95/yr             |
| 4 | MED     | Add Attic Baffles for Cross-Ventilation   | \$70/yr             |

## CERTIFICATION

I certify the foregoing measurements, photographic evidence, thermal radiometry, and damage classifications were captured under STRATEX™ Phase-3 Expert Agent protocols with ground-truth accuracy of ±0.78 cm. This report is suitable for insurance carrier review.

INSPECTOR

STRATEX™ Forensic Division · A. Cross, RRO  
KY-RRO-08821 · NRCIA-CRI-7741

REPORT ID

AD-KY041  
ISSUED 2026-06-25

DISCLAIMER · This report is the proprietary work product of STRATEX™ Forensic Division. Findings are based on aerial drone reconnaissance, photogrammetric mesh reconstruction, and radiometric thermal analysis captured on the scan date. Concealed conditions discoverable only after tear-off are documented in the unforeseen-repair reserve. Reproduction or transmission without authorization is prohibited.